



Core pin

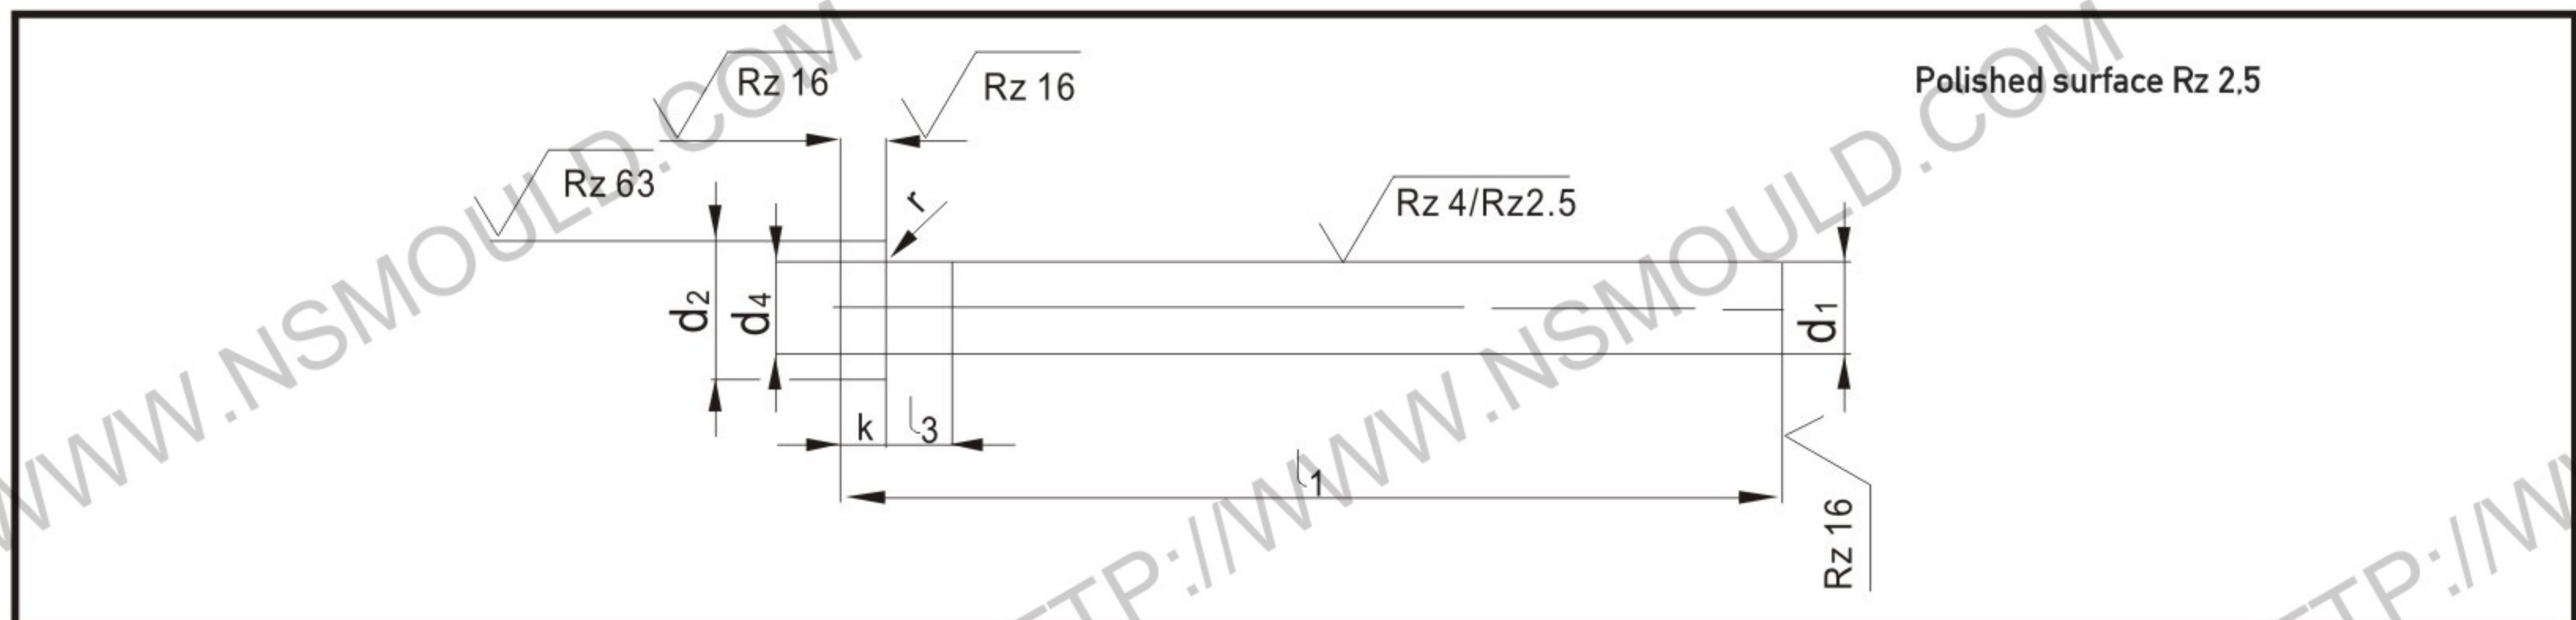

Similar to ISO6751 DIN1530

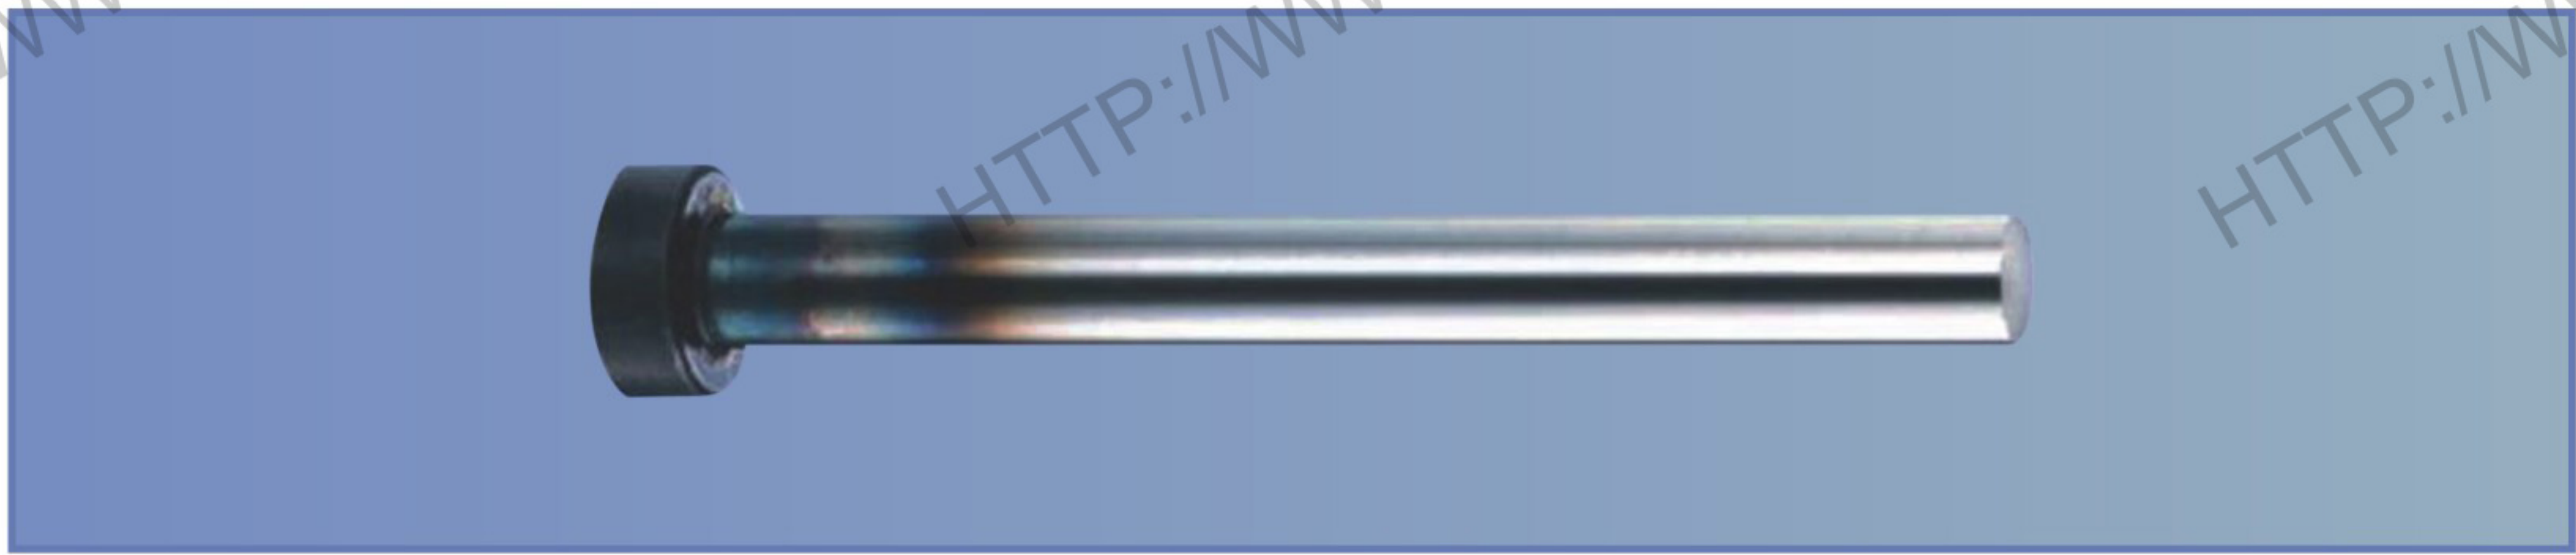

- Material: 1.2343, 1.2344 or similar.
- Hardness: Shaft Core strength approx. 1400 N/mm²
- Head HRC45±5
- Cylindrical head hot forged with hardened shaft, tempered and fine ground to g6

Order format: Core pin DIN1530-A d₁*l₁

d1g6	d2 ⁰ _{-0.2}	d4 ca.	k ⁰ _{-0.05}	r	l ₁ ⁺²										l ₃ appr.					
					100	125	160	200	250	315	400	500	630	800						
1.5	3	d1 +0.03	1.5	0.2	•	•	•	•	•	•						5				
2.0	4				•	•	•	•	•	•	•									
2.2	4				•	•	•	•	•	•	•									
2.5	5				•	•	•	•	•	•	•	•								
2.7	5				•	•	•	•	•	•	•	•	•				•	•		
3.0	6		•	•	•	•	•	•	•	•	•			•	•					
3.2	6		•	•	•	•	•	•	•	•	•			•	•					
3.5	7		•	•	•	•	•	•	•	•	•			•	•					
3.7	7		•	•	•	•	•	•	•	•	•			•	•					
4.0	8		•	•	•	•	•	•	•	•	•			•	•					
4.2	8		•	•	•	•	•	•	•	•	•			•	•					
4.5	8		•	•	•	•	•	•	•	•	•			•	•					
5.0	10		•	•	•	•	•	•	•	•	•			•	•					
5.2	10		•	•	•	•	•	•	•	•	•			•	•					
5.5	10		•	•	•	•	•	•	•	•	•			•	•					
6.0	12	d1 +0.04	3	0.3	•	•	•	•	•	•	•			•	•	6				
6.2	12				•	•	•	•	•	•	•	•	•				•	•		
6.5	12				•	•	•	•	•	•	•	•	•				•	•		
7.0	14				•	•	•	•	•	•	•	•	•				•	•		
8.0	14				•	•	•	•	•	•	•	•	•				•	•		
8.2	14				•	•	•	•	•	•	•	•	•				•	•		
8.5	14				•	•	•	•	•	•	•	•	•				•	•		
9.0	16				•	•	•	•	•	•	•	•	•				•	•		
10.0	16				•	•	•	•	•	•	•	•	•				•	•		
10.2	16				•	•	•	•	•	•	•	•	•				•	•		
10.5	16	•	•	•	•	•	•	•	•	•			•	•						
11.0	18.20	d1 +0.07	5	0.5	•	•	•	•	•	•	•			•	•	10				
12.0	18.20				•	•	•	•	•	•	•	•	•				•	•		
12.2	18.20				•	•	•	•	•	•	•	•	•				•	•		
12.5	22				•	•	•	•	•	•	•	•	•				•	•		
14.0	22				•	•	•	•	•	•	•	•	•				•	•		
16.0	22		•	•	•	•	•	•	•	•	•			•	•					
18.0	24		7	8	0.8	•	•	•	•	•	•	•			•		•	12		
18.20	24					•	•	•	•	•	•	•	•	•					•	•
18.5	24					•	•	•	•	•	•	•	•	•					•	•
20.0	26					•	•	•	•	•	•	•	•	•					•	•
20.5	26	•				•	•	•	•	•	•	•	•			•	•			
20.0	26	8	8	1.0	•	•	•	•	•	•	•			•	•	18				
20.5	26				•	•	•	•	•	•	•	•	•				•	•		
21.0	26				•	•	•	•	•	•	•	•	•				•	•		
21.5	26				•	•	•	•	•	•	•	•	•				•	•		
22.0	26				•	•	•	•	•	•	•	•	•				•	•		