


Conical head ejector pin



Standard: DIN 1530-D

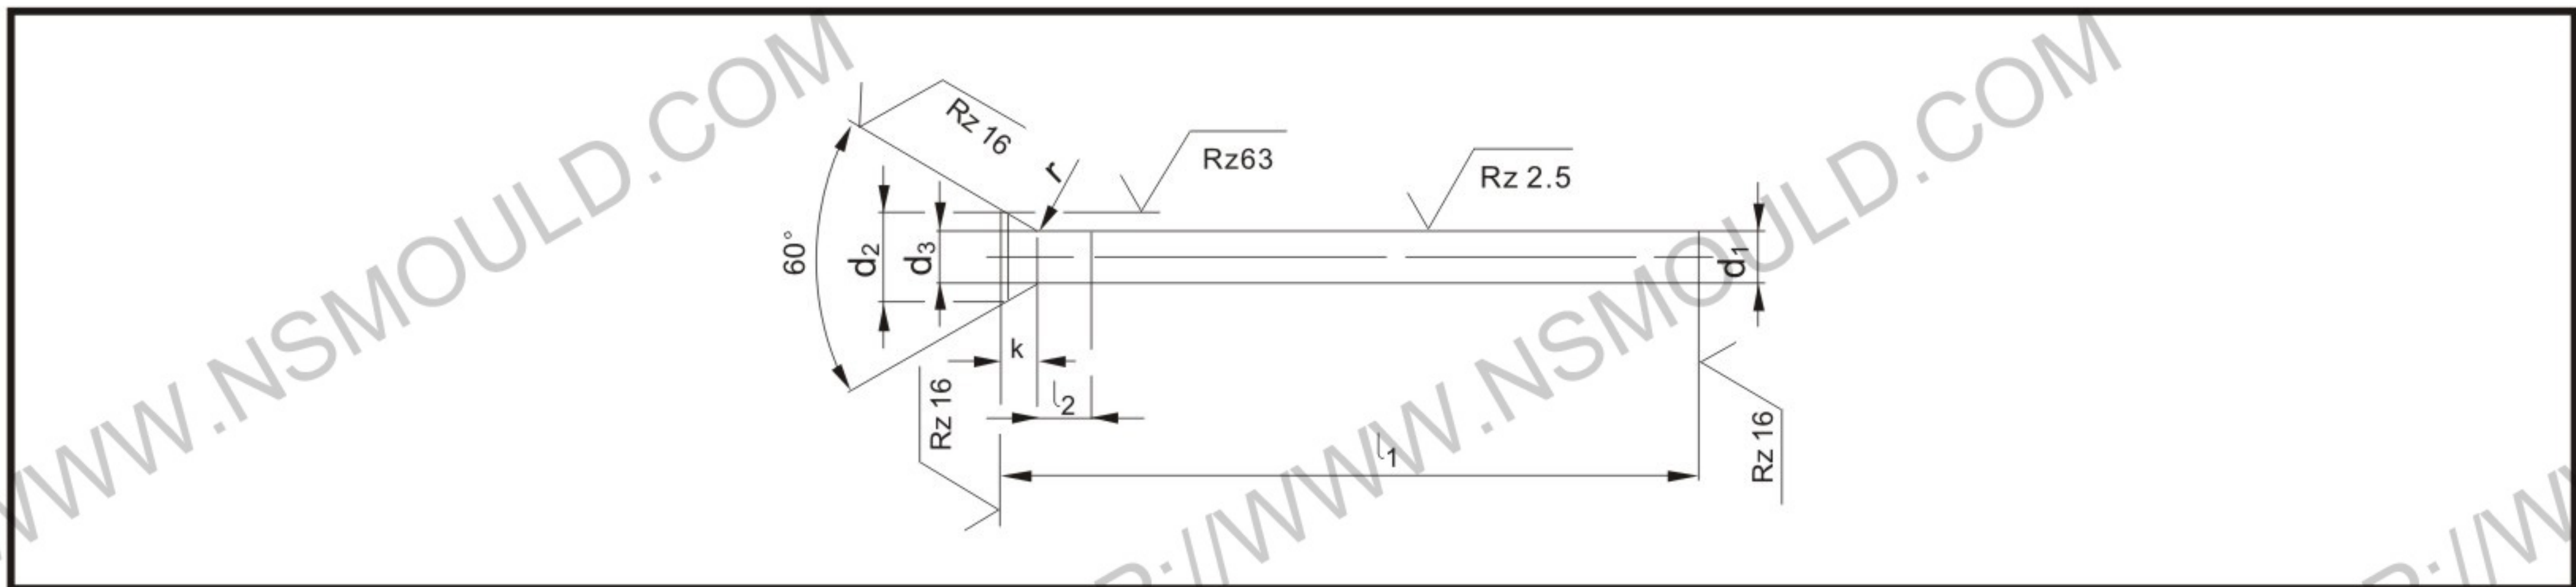

Material: 1.2210, 1.2067 or similar

Hardness: Shaft HRC60 ± 2
Head HRC45 ± 5

Head hot forged, shaft hardened, tempered and fine ground finished to g6

Temper resistance at least 200°C

Order format: Ejector pin DIN1530-Dd1* l1

d1g6	d2±0.1	k+0.2 0	l1 +2 0							d3	l2	
			100	125	160	200	250	315	400			500
1.0	1.8	1.2	•	•	•						5	
1.2	2.0	1.2	•	•	•							
1.5	2.2	1.11	•	•	•	•	•					
1.6	2.5	1.3	•	•	•	•	•					
1.8	2.8	1.4	•	•	•	•	•					
2.0	3.0	1.4	•	•	•	•	•					
2.2	3.2	1.45	•	•	•	•	•					
2.5	3.5	1.4	•	•	•	•	•					
2.6	4.0	1.7	•	•	•	•	•					
2.8		1.54	•	•	•	•	•					
3.0	4.5	1.8	•	•	•	•	•	•	•	d1 +0.03		
3.2		1.63	•	•	•	•	•	•	•			
3.5	5.0	1.8	•	•	•	•	•	•	•			
3.6		1.7	•	•	•	•	•	•	•			
3.8		1.7	•	•	•	•	•	•	•			
4.0		1.8	•	•	•	•	•	•	•			
4.2	5.5	1.8	•	•	•	•	•	•	•		6	
4.5			1.8	•	•	•	•	•	•			•
5.0	6.5	1.8	•	•	•	•	•	•	•			
5.2			1.8	•	•	•	•	•	•			•
5.5	7.0	1.8	•	•	•	•	•	•	•			
6.0			1.8	•	•	•	•	•	•	•		
6.2			2.2	•	•	•	•	•	•	•		
6.5			3.2	•	•	•	•	•	•	•		
7.0	9.0	2.7	•	•	•	•	•	•	•			
7.5		3.2	•	•	•	•	•	•	•			
8.0	10	2.7	•	•	•	•	•	•	•	d1 +0.04		
8.2			2.7	•	•	•	•	•	•		•	
8.5			3.2	•	•	•	•	•	•		•	
9.0			3.2	•	•	•	•	•	•		•	
10	11	2.7	•	•	•	•	•	•	•		10	
12			2.7	•	•	•	•	•	•		•	12
14			3.2	•	•	•	•	•	•		•	14
16			3.2	•	•	•	•	•	•		•	16