


Blade ejector pin



Standard: DIN 1530-FA DIN1530-FAH ISO8693

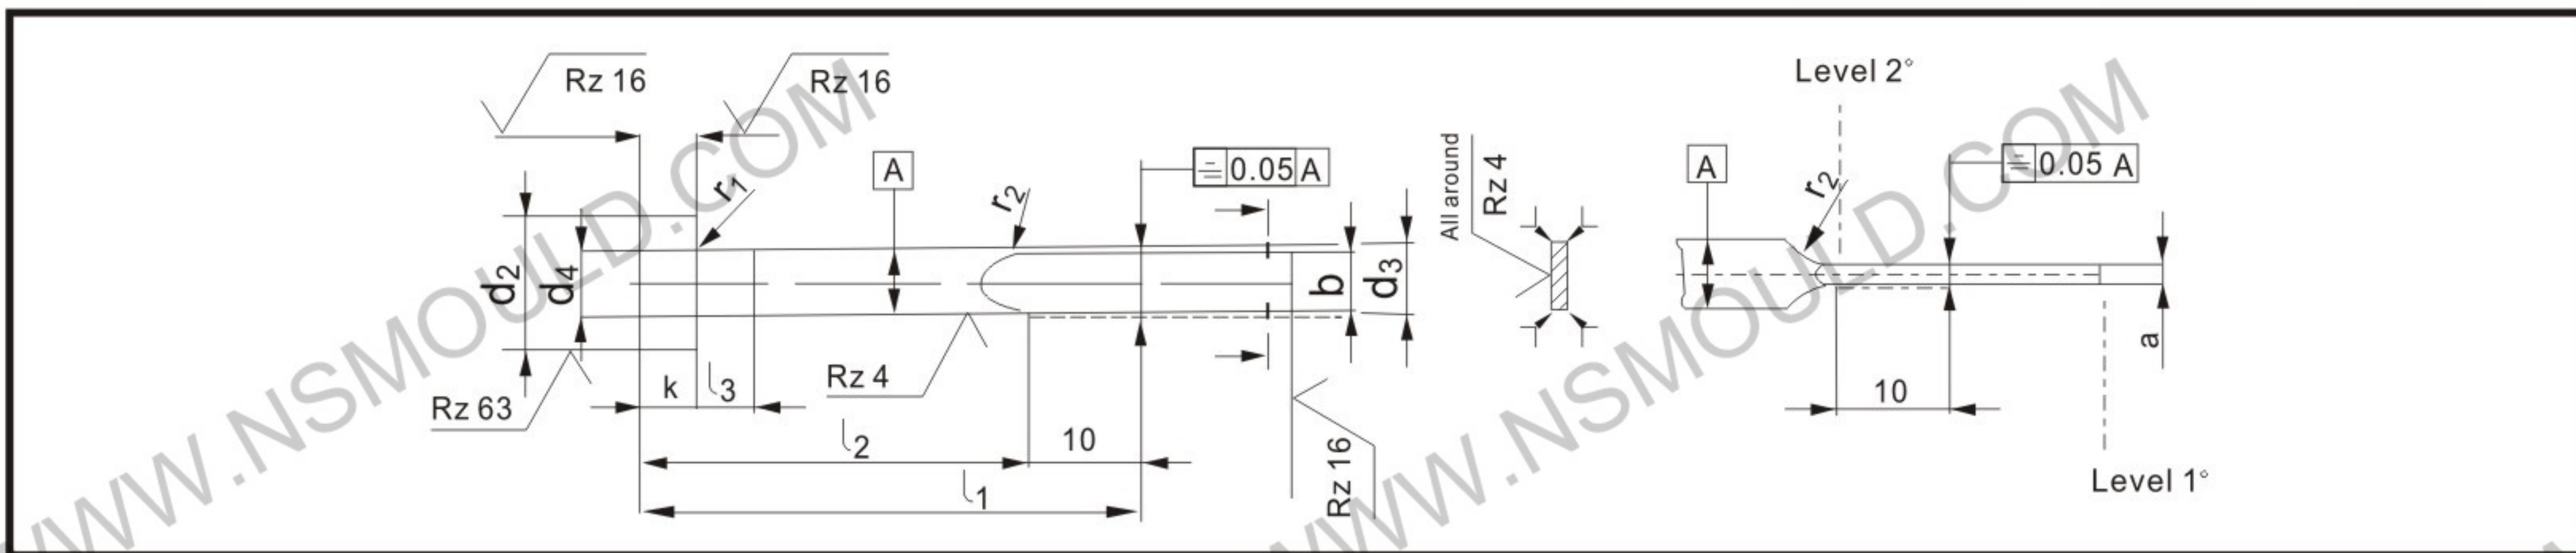

DIN1530-FAH

Material: 1.2842, 1.2067 or similar

Hardness: Shaft HRC60±2 Head HRC45±5

Temper resistance at least 200

DIN1530-FA

Material: 1.2344

Hardness: Shaft above HV950 Inner HRC45±5

Core strength approx. 1400n/mm Head HRC45±5

Temper resistance at least 600°C, black finish or polished finish

order format: Blade ejector pin DIN1530-FA a* b* d3* l1

Blade ejector pin DIN1530-FAH a* b* d3* l1

a	b	d ₃	d ₂	d ₄	k	r ₁	r ₂	l ₁ + 2/0										l ₃						
								63	80	100	125***	160	200	250	315	400								
0	0	h11	0	appr.	0	+ 0.2	min											appr.						
-0.015	-0.015		-0.2		-0.05	0																		
*	*																							
0.8	3.5	4.0	8	d ₃	3	0.3	10	•	•	•	•													
1.0**								•	•	•	•													
1.2								•	•	•	•													
1.0**								•	•	•	•													
0.8	3.8	4.2	10	d ₃	3	0.3	10		•	•	•	•												
1.0								•	•	•	•													
1.2								•	•	•	•													
1.0								•	•	•	•													
1.2	4.5	5	10	d ₃	5	0.5	10	•	•	•	•	•												
1.5								•	•	•	•													
1.0								•	•	•	•													
1.2								•	•	•	•													
1.5	5.5	6	12	d ₃	5	0.5	10	•	•	•	•	•												
2.0								•	•	•	•													
1.2								•	•	•	•													
1.5								•	•	•	•													
2.0	7.5	8	14	d ₃	7	0.8	10		•	•	•	•	•											
1.5								•	•	•	•													
2.0								•	•	•	•													
1.2								•	•	•	•													
1.5	9.5	10	16	d ₃	7	0.8	10			•	•	•	•	•										
2.0								•	•	•	•													
1.5								•	•	•	•													
2.0								•	•	•	•													
2.0	11.5	12	18	d ₃	7	0.8	10				•	•	•	•	•									
2.5								•	•	•	•													
2.0								•	•	•	•													
2.5								•	•	•	•													
2.0	15.5	16	22	d ₃	7	0.8	10					•	•	•	•	•								
2.5								•	•	•	•													